


Steam used for secondary heating like coils, vessels, heat exchangers etc, generate a lot of condensate post heat transfer. This large quantity of condensate can be handled by the Inverted Bucket Trap. This condensate has a substantial heat component with cost tagged to it. Also this is treated & pure water and can be used as Feed water for the boiler, saving the cost of heating, water bill and treatment chemicals. Therefore it makes sense to recycle / reuse this condensate. This function is done by the Inverted Bucket Trap which works on the principle of buoyancy [density difference of Water and Steam]. The rise in condensate level fills and envelopes the bucket causing it to sink which opens the mechanically linked valve and discharges the condensate, and reverse when the level of condensate drops, steam enters the bucket, causes the flotation of the bucket which close the valve and stops condensate discharge & traps the live steam.

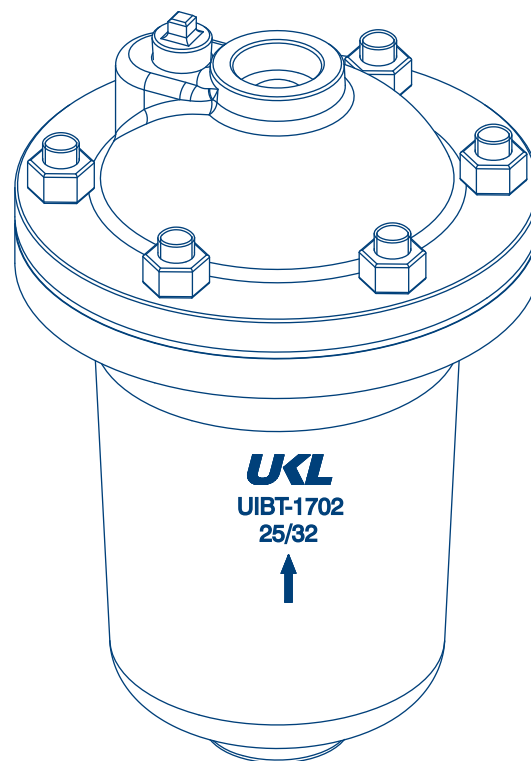

FEATURES:-

- UKL UIBT is optimally sized for complete removal of condensate.
- UKL UIBT is designed to eliminate internal damages caused by impingement of condensate.
- Maintenance free and long life.

END CONNECTIONS:-

Screwed to BSP / BSPT / NPT
Socket Weld to ASME B 16.11
Flanged End #150

MATERIAL OF CONSTRUCTION:-

ASTM A216 Gr. WCB (Cast Carbon Steel)

SIZES AVAILABLE:-

25 NB & 32 NB
1" NB & 1-1/4" NB

OPTIONAL:-

IBR (On Request)
Flanged End Connections

AVAILABLE DIFFERENTIAL

PRESSURE (DP) :-

1 / 2 / 4 / 5.5 / 8.5 / 12.5 / 17 Kg/cm² (g)
15 / 30 / 60 / 79 / 122 / 178 / 242 PSI

OPERATING CONDITIONS:-

Maximum Operating Pressure :- 17 Kg/cm² (g)
Maximum Operating Temperature :- 400°C

Maximum Operating Pressure :- 242 PSI
Maximum Operating Temperature :- 752°F


DESIGN CONDITIONS:-

Maximum Design Pressure :- 17 Kg/cm² (g)
Maximum Design Temperature :- 426°C

Maximum Design Pressure :- 242 PSI
Maximum Design Temperature :- 799°F

Inverted Bucket Steam Trap

UIBT - 1702

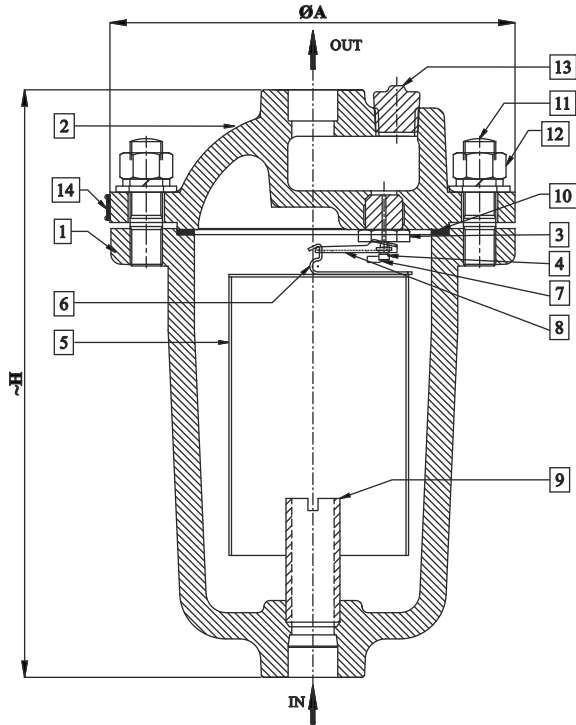



DIMENSIONS UIBT - 1702		
ØA	190.0 mm	7.48 Inch
~H	320.0 mm	12.6 Inch
WEIGHT (SW/SCREWED)	~18.0 Kgs	~39.7 lb

BILL OF MATERIAL:

PART NO.	DESCRIPTION	M.O.C.
1	BODY	ASTM A 216 Gr. WCB
2	COVER	ASTM A 216 Gr. WCB
3	VALVE SEAT	ASTM A 681 Gr.D2
4	VALVE PIN	ASTM A 681 Gr.D2
5	BUCKET	AISI 304
6	BUCKET HOOK	AISI 304
7	BRACKET ASSEMBLY	AISI 304
8	LEVER ASSEMBLY	AISI 304
9	INLET TUBE	ASTM A 106 Gr. B
10	BODY GASKET	SPW AISI 316 + GRAPHITE
11	STUDS	ASTM A 193 Gr. B7
12	NUTS	ASTM A 193 Gr. 2H
13	PLUG	ASTM A 105
14	NAME PLATE	STAINLESS STEEL

Note –All dimensions and weights are approximate.

FLOW CAPACITY CHART - UIBT - 1702

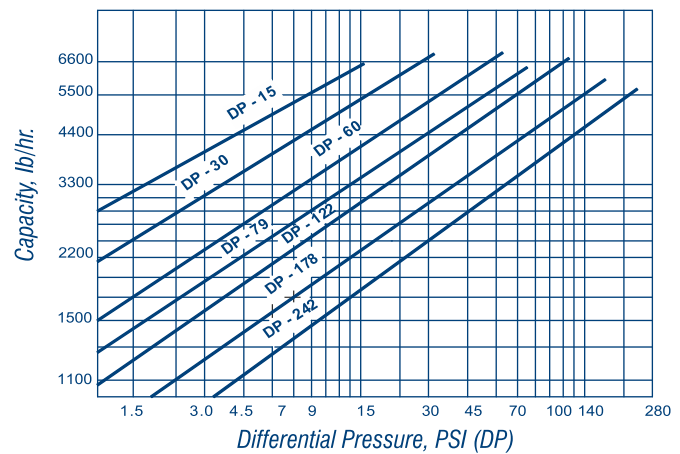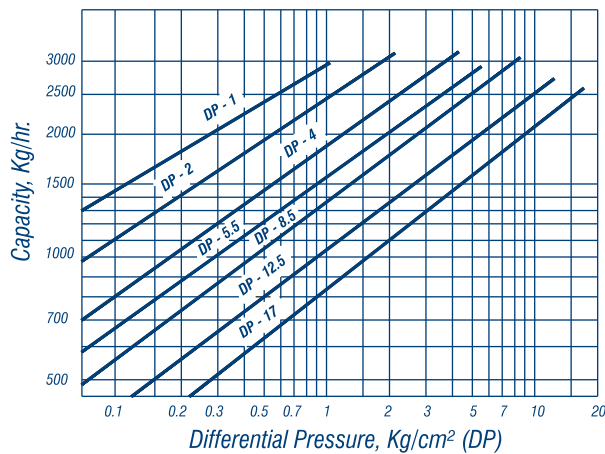

In view of technical progress designs and dimensions are subject to change without notice.

UNI KLINGER LIMITED

A joint venture of the Neterwala group of companies and KLINGER AG, Switzerland.

e-mail : salescso@uniklinger.com, Website : www.uniklinger.com